

HURRICANE RATED BAHAMA HINGE BY EASTERN METALS FASTENED TO SUBSTRATE BEYOND W/ A MINIMUM OF (8) 1/2" DIA. X 2 1/2" LONG SQUARE DRIVE STAINLESS STEEL DECK SCREWS. TYP. FASTEN HINGE TO SHUTTER W/ (4) #10-24 X 1 1/2" TRUSS HEAD BOLT WITH NYLOX NUT



STAINLESS STEEL LOCKING HINGE DEVICE FASTENED TO SUBSTRATE W/ A MINIMUM OF (3) 1/2" DIA. X 2 1/2" LONG SQUARE DRIVE STAINLESS STEEL DECK SCREWS. TYP.


SHUTTER SECTION (BAHAMA)

SCALE: 1"=1'-0"

NOTES

- THIS SHUTTER IS PROTECTED BY U.S. PATENT 7,036,286
- OTHER PATENTS ARE PENDING
- MAXIMUM TESTED SIZE: 40" WIDTH X 120" LENGTH
- MAXIMUM TEST PRESSURE (DESIGN PRESSURE): 63 PSF
- THESE ASSEMBLIES HAVE BEEN TESTED IN ACCORDANCE WITH AND CERTIFIED BY HURRICANE TESTING LABS, INC. TO MEET THE FOLLOWING CODES & STANDARDS:
- ASTM E630
- ASTM E1886
- ASTM E1998

HURRICANE RATED BAHAMA HINGE BY EASTERN METALS FASTENED TO SUBSTRATE BEYOND W/ A MINIMUM OF (8) 1/2" DIA. X 2 1/2" LONG SQUARE DRIVE STAINLESS STEEL DECK SCREWS. TYP. FASTEN HINGE TO SHUTTER W/ (4) #10-24 X 1 1/2" TRUSS HEAD BOLT WITH NYLOX NUT

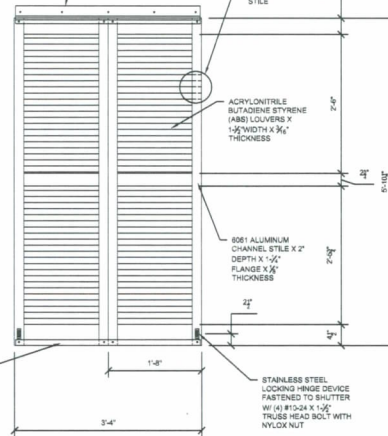

8061 ALUMINUM L 1 1/2" X 1 1/2" X 1/2" SUPPORT ANGLE FASTENED TO SHUTTER W/ (4) #10-24 X 1 1/2" TRUSS HEAD BOLT WITH NYLOX NUT

EXTEND LOUVERE INTO ALUMINUM SIDE STYLE

ACRYLONITRILE BUTADIENE STYRENE (ABS) LOUVERE X 1 1/2" WIDTH X 3/4" THICKNESS

8061 ALUMINUM CHANNEL STYLE X 2" DEPTH X 1/2" FLANGE X 3/4" THICKNESS

STAINLESS STEEL LOCKING HINGE DEVICE FASTENED TO SHUTTER W/ (4) #10-24 X 1 1/2" TRUSS HEAD BOLT WITH NYLOX NUT

SHUTTER EXTERIOR ELEVATION (BAHAMA)

SCALE: 1"=1'-0"

NOTES

- THIS SHUTTER IS PROTECTED BY U.S. PATENT 7,036,286
- OTHER PATENTS ARE PENDING
- MAXIMUM TESTED SIZE: 40" WIDTH X 120" LENGTH
- MAXIMUM TEST PRESSURE (DESIGN PRESSURE): 63 PSF
- THESE ASSEMBLIES HAVE BEEN TESTED IN ACCORDANCE WITH AND CERTIFIED BY HURRICANE TESTING LABS, INC. TO MEET THE FOLLOWING CODES & STANDARDS:
- ASTM E630
- ASTM E1886
- ASTM E1998